

Performance analysis of TCP and SCTP over Satellite Networks due to Effect of Congestion Control

Shashi Bhushan¹, Praveen Kr. Rai²

^{1,2}Assistant Professor, CSE, IIMT college of Engineering

Abstract—Stream Control Transmission Protocol (SCTP) is a new transport layer protocol which can be deployed in the Internet along with TCP. In this paper, we investigate the performance issues that arise when SCTP and TCP are used in the same satellite network. We evaluate performance through measurement of throughput, and also fairness of use of networks resources by the two protocols. We observed that SCTP is fair, although SCTP always achieved slightly higher throughput than TCP. We have analyzed the results to show that differences in the congestion control mechanism of TCP and SCTP are responsible for the higher throughput attained by SCTP.

I. INTRODUCTION

The Internet Protocol suite glues together a large number of different computer systems and networks. The IP protocol can support many different transport layer protocols, with TCP being the most widely used protocol. Recently, the Stream Control Transmission Protocol (SCTP) [1] has been standardized by the IETF as a reliable transport layer protocol for carrying Public Switched Telephone Network (PSTN) signaling messages over IP networks. However, its advanced congestion control and fault tolerant features also make it suitable for carrying data in computer networks, for which it has already been proposed as an alternative to TCP [2]. SCTP is essentially a reliable, message-oriented data transport protocol that supports multiple streams (called multi streaming in (SCTP) within an association, and hosts with multiple network addresses (called multihoming) [3]. SCTP is particularly valuable to applications where monitoring and detection of loss of session is required. For such applications, the SCTP path/session failure detection mechanisms, especially the heartbeat, will actively monitor the connectivity of the session. The following services are also provided to its users [4]:

1. Acknowledged error-free non-duplicated transfer of user data.
2. Data fragmentation to conform to discovered path Maximum Transmission Unit (MTU) size.
3. Sequenced delivery of user messages within multiple streams, with an option for order-of-arrival delivery of individual user messages.
4. Optional bundling of multiple user messages into a single SCTP packet.
5. Network-level fault tolerance through support of multi homing at either or both ends of an association.
6. Resistance to coding and masquerade attacks. SCTP has an advanced congestion control mechanism that is used to recover from segment losses effectively and efficiently. Many aspects of the congestion control of SCTP are similar to those of TCP, though SCTP also offers features such as byte-oriented congestion window (instead of segment-oriented, as in TCP). SCTP can also perform a rapid recovery of lost segments in an error-prone network; it can therefore transmit segments at a faster rate than TCP as described in Secs. V-B and V-C. Further differences in congestion control that are advantageous to SCTP are detailed in Sec. II.

The faster rate achieved by SCTP sources than TCP sources raises the issue of fairness among the protocols when they are deployed in the same network. Fairness measures the distribution of network

resources among the sources using different protocols such as SCTP and TCP. Maintaining fairness among multiple transport protocols in the network is essential in the uniform distribution of network resources, and the widespread acceptance of the network itself [5]. Fairness can be dealt with not only at the transport level by the senders and receivers, but also at the network level. Fairness can be significantly improved by the participation of the network (eg. through some fair queuing strategy at routers). The aim of this paper is to study fairness issues resulting at the transport layer, from the protocols SCTP and TCP sharing a common network. In this paper, we focus on networks with large delay bandwidth product links, such as satellite networks. The delays in satellite networks are influenced by several factors, the main one being the orbit type [6]. One-way delay of Low Earth Orbit (LEO), Medium Earth Orbit (MEO) and Geostationary Earth Orbit (GEO) satellites are about 25ms, 130ms and 260ms respectively. Their channel bandwidths can vary from a few kb/s to as large as 622 Mb/s. Problems arising when TCP is run over satellite links have been studied by many researchers [7], [8], and solutions to the problems have been also been reported in the literature [9]. In this paper, we consider SCTP over GEO satellite links.

The objective of this paper is two-fold. First, we determine if one protocol achieves a better throughput than another, and what the level of any resulting unfairness is, for various numbers of TCP and SCTP sources in the same satellite network. We then aim to determine the impact of the advanced congestion control mechanism of SCTP on NASA Earth Science Technology Conference, Pasadena, CA, and June 11-13, 2002 the results obtained from the rest part of our objective. We have carried out simulations to accomplish our objective. TCP and SCTP sources shared the same long-delay network, and the throughput and fairness were obtained from the simulations. Network simulator ns 2.1, with a SCTP patch from the University of Delaware was used to conduct the simulation experiments. We have found that SCTP achieves a considerably higher throughput than TCP, although a high degree of fairness is exhibited by the protocols. We have examined the congestion control mechanisms of the two protocols in detail, and found that SCTP has inherent congestion control properties that allow it to achieve higher throughput. The contributions of this work can be summarized as follows.

1. We have shown that TCP and SCTP are fair in sharing resources in a satellite network.
2. Our results show that although the fairness is highest, SCTP achieves a higher throughput as compared to TCP.
3. We have demonstrated that SCTP congestion control results in a larger average congestion window and faster recovery after segment loss, which is responsible for the higher throughput of SCTP. The remainder of this work is organized as follows.

SCTP association and its congestion control mechanisms are described in Sec.

II. THE NETWORK TOPOLOGY

Parameters and configurations used in our simulations are detailed in Sec. III. Sec. IV provides the metrics used to measure the performance of TCP and SCTP. Results on throughput and Fairness of SCTP along with a detailed interpretation of the results are presented in Sec. V, while Sec. VI discusses the case when the satellite link is fully utilized. Finally, section VII summarizes the conclusions that have been drawn from this study. II. SCTP Association and Congestion Control An association in SCTP is analogous to a TCP connection. An SCTP data source is able to transfer segments to the destination in the context of an association. Data is transmitted between the source and destination in the form of segments, that contain a common header and a Sequence of structures called chunks [14]. During setup of association, various information is exchanged between the two participating nodes. Each data chunk transmitted is assigned a unique 32-bit Transmission Sequence Number (TSN), which is one larger than that of the previous data chunk sent. SCTP uses an end-to-end window based flow and congestion control mechanism similar to the one that is well known from TCP [15]. Certain extensions of the TCP congestion control mechanism have been incorporated

to accommodate the multihoming aspect of SCTP, and the message-based (rather than the stream-based) nature of the protocol. The data receiver may control the rate at which the sender is sending by returning a receiver window size (rwnd) along with all SACK chunks. The sender itself keeps a variable known as the congestion window (cwnd) that controls the maximum number of outstanding bytes (i.e. bytes that may be sent before they are acknowledged). The receiver must acknowledge all data chunks; the receiver may however, wait (maximum of 200 ms) before sending the acknowledgement. A. Overview of SCTP Congestion Control As in TCP, congestion control of SCTP has two modes, slow-start and congestion-avoidance. The mode is determined by the set of congestion control variables, and these are path specific. A path of an SCTP multihoming [10] association is one of the connections set up between a source and a destination. So, while the transmission to the primary path may be in the congestion-avoidance mode, the implementation may still use slow-start for the backup path(s). For successfully delivered and acknowledged data, the cwnd is steadily increased, and once it exceeds a certain boundary (called slow-start-threshold, ssthresh), the mode changes from slow-start to congestion-avoidance. In slow start, the cwnd is increased faster (roughly one MTU per received SACK chunk), and in congestion-avoidance mode, it is only increased by roughly one MTU per round-trip-time, (rtt). During both the modes, a variable called right-size keeps track of the total number of bytes that have not yet been acknowledged. During congestion-avoidance, the variable called Partial Bytes Acknowledged (pba), keeps count of the number of bytes in the current cwnd that have been acknowledged so far, and this variable decides whether the cwnd should be increased with the next transmission. Events that trigger retransmission (timeouts or Fast Retransmission [15]) cause the ssthresh to be cut down drastically, and reset the cwnd. A timeout causes a new slow-start with $\text{cwnd}=1$ MTU, and a Fast Retransmit halves Delay=250ms Satellite Router Router SCTP TCP SCTP TCP.

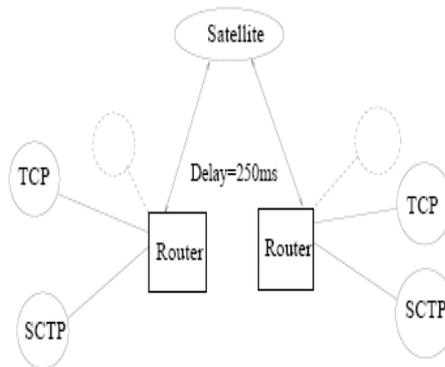


Figure 1.0 Satellite Network

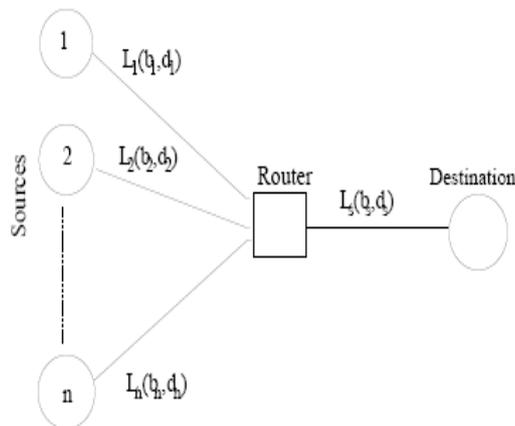


Figure 2.0 Simulation Model

No. of Sources	Router Buffer size (Segments)	Ls Bandwidth(Mbps)
2	10	2
4	40	4
6	80	7
8	160	11

TABLE 1.0 Router Buffer Sizes and Bottleneck Band Widths

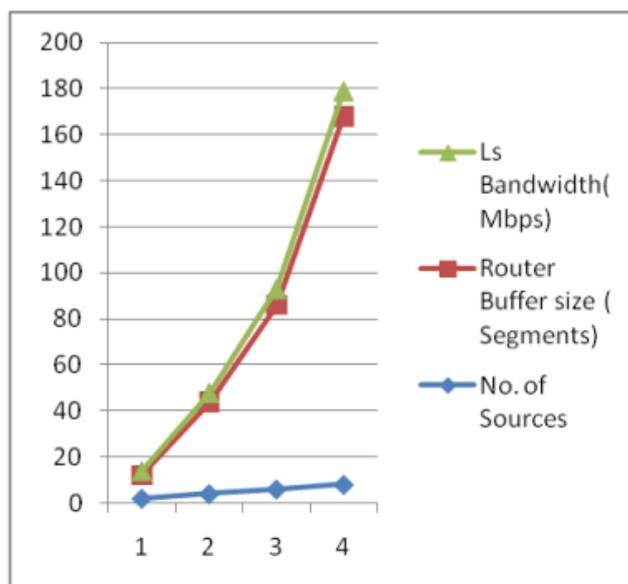


Figure 3.0

III. EXPERIMENTAL SETUP

In this thesis, we assume a number of TCP and SCTP sources connected via a satellite link to the corresponding destinations as shown in Fig. 1. The satellite link has alone-way propagation delay of 250ms which corresponds to the delay of a GEO satellite link.

A. Network Topology

The network topology of Fig. 1 was modeled using the ns 2.1 network simulator [16] as shown in Fig. 2. All the results were obtained from implementations of TCP and SCTP in the network simulator with an SCTP patch from the University of Delaware.

TCP and SCTP sources (labeled 1 to n , where $n \geq 2$ and n is an even number) send segments through links L_1 to L_n to a destination node, a constant distance away. Each link has a bandwidth and delay, shown in the diagram by the tuple (b_x, d_x) , where $1 \leq x \leq n$. A router between the sources and satellite link queues incoming segments from links L_1 to L_n , and then transmits them along the bottle-neck link L_s . Though the topology uses one destination node, it has n separate agents to establish a connection with each of the sources 1 to n .

B. Network Parameters

Several simulations were run, starting from one TCP and one SCTP source to four TCP and four SCTP sources, with an equal number of TCP and SCTP sources for every run. The propagation delays of links L_1 to L_n were set at 2ms, while the delay of L_s was 250ms. To ensure fairness to the

sources before the segments arrived at the router, the parameters of links L1 to Ln were kept the same. As the number of sources was increased, the router buffer size and the bottleneck bandwidth were also increased to accommodate the increased segment arrival rate at the router. The router buffer size and satellite link band-width combinations used for different number of sources are listed in Table I.

Data corruption in the satellite link was simulated by error-module at the link which dropped packets with 1.5% probability. To take advantage of the large delay bandwidth product of the satellite link, the buffer sizes of both the TCP and SCTP receivers was set to a large value of 64KB. One-way large le transfer traffic was generated by using ftp traffic generator at the sources.

C. TCP and SCTP Source Configurations

We wanted to study the congestion control schemes of TCP and SCTP in this study. We therefore, configured the TCP and SCTP hosts as similar to each other as possible as given below.

1. Selective Acknowledgement (SACK) is mandatory for SCTP; The SACK option of TCP was therefore enabled.
2. Delayed acknowledgement was not used in either TCP or SCTP.
3. Since TCP uses only one connection between the source and destination, SCTP was configured to use one stream per association.
4. The payload of each segment (that is, without headers) was 1488 bytes for both protocols.
5. The initial rwnd for both was set to 64KB.
6. The initial ssthresh was made equal to rwnd for both protocols.

IV. PERFORMANCE METRICS

This section provides details of the measures used to study the performance of the simulated networks. Though there exist many metrics for quantifying fairness, a standard does not exist. This paper uses a fair share per link metric [17], as given by Jain in [18]. Fairness, given by ω is computed as follows:

$$\omega = \frac{(\sum_{i=1}^n b_i)^2}{n * (\sum_{i=1}^n b_i^2)} \quad (1)$$

Where, n is the number of flows through the bottleneck link, and b_i is the fraction of the bottleneck link bandwidth obtained by flow i. The value of fairness obtained through this method ranges from $1/n$ to 1, with 1 indicating equal allocation to all sources.

For a two sources case, we define the Percentage Increase in Throughput (δ) of source 1 over source 2 by:

$$\delta = \frac{\lambda_1 - \lambda_2}{\lambda_2} \times 100 \quad (2)$$

where λ_i is the throughput of source i. Link utilization ψ of the bottleneck link L2 was calculated as [17]:

$$\psi = \frac{\sum_{i=1}^n \lambda_i}{b_s} \times 100 \quad (3)$$

Where b_s is the bottleneck link bandwidth (see Fig. 2).

V. RESULTS

This section presents the results obtained from simulations and the analysis of the results. Most of the graphs presented depict a steady-state of the simulation (approximately after the first 50 seconds of simulation).

Four scenarios were studied and each simulated for 500 seconds. In the first scenario, $n = 2$, i.e. one TCP and one SCTP source. For each consecutive scenario, n was increased by two, so in scenario four, $n = 8$. As mentioned in Sec. III-B, there was an equal number of TCP and SCTP Sources.

No. of Sources	% Incr in Thruput	Link Utilzn (%)	Fairness
4	23.9	21.5	0.988
6	26.1	21.6	0.986
8	19.24	18.4	0.992
10	21.6	15.8	0.989

Table 2.0 Percentage increasing in throughput, link utilization and fairness for the four scenarios

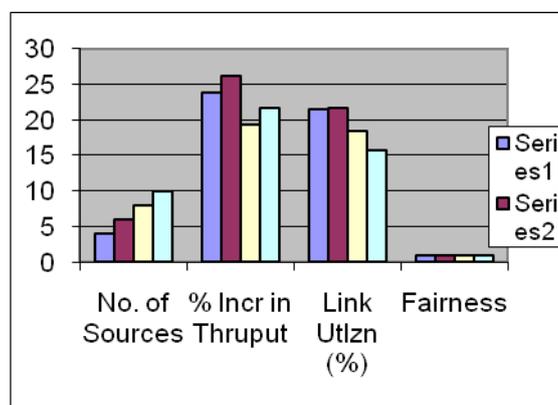


Figure 4.0 Charts for Table 2.0

No of Sources	% Incr in Throughput	Link Utilzn (%)	Fairness
2	17.3	96	0.994
4	15.8	90.5	0.995
6	30.6	99.7	0.983
8	14.9	96.1	0.995

Table 3.0 Percentage Increase In throughput, Link Utilization and Fairness for Second Set of Experiments

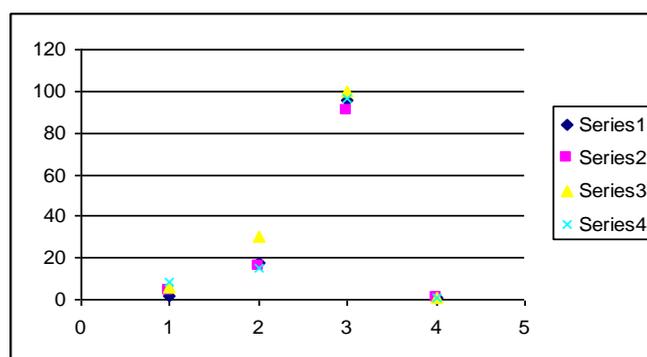


Figure 5.0

A. Percentage Increase in Throughput, Link Utilization and Fairness

Table II shows the percentage increase in throughput of SCTP over TCP, the link utilization and fairness for each scenario. Percentage increase in throughput was obtained using Eqn. 2, link utilization from Eqn. 3 and fairness from Eqn. 1. The table shows that there is a positive percentage increase ranging from 19.24% to 26.1% for all the four scenarios. This indicates that SCTP is able to transmit more data than TCP in the same time range.

Due to space constraints, the remainder of this Results section presents the results obtained from the two-source scenario. Figs. 3 and 4 show plots of sequence numbers of segments sent and SACKs received (both mod 100) by the TCP and SCTP sources, respectively, with respect to time. A count of the number of segments in the plots show that in the time frame of 50 to 150 sec, TCP transmits about 1500 segments, while SCTP transmits about 2300 segments. The reason for SCTP being able to send more segments than TCP will be discussed in Sec. V-B

Link utilization is poor for all the cases, as seen in Table II. This can be attributed to the fact that the bottleneck satellite link has a long delay, and when losses are detected at multiple hosts, few packets are sent along the bottleneck link because the sources are in the congestion avoidance mode. So the combined throughput is low most of the time, as can be seen in Fig. 5 that shows the total throughput in Ls with respect to time for the two-source scenario during the first 40 seconds of simulation.

Though there is a considerable percentage increase in throughput of SCTP over TCP in all the simulations, the fairness values (see Table II) obtained show that each of the networks is nearly always fair. This is because they both underutilize link Ls due to its long propagation delay; The fraction of the total bottleneck bandwidth available that is used by both the sources is small. So even though SCTP yields a higher throughput when compared to TCP, the degree of unfairness in the network is low. The next subsection looks into how differences in the cwnd of TCP and SCTP contribute to the higher throughput of SCTP.

B. Congestion Windows of TCP and SCTP

Figs. 4 and 5 show variation of cwnd of TCP and SCTP sources due to loss of segment 8 by both the sources. At that point, they were both ramping up in slow start, and cwnd was eight when the segments were dropped. The loss of segment 8 was detected when cwnd was nine for both TCP and SCTP. This point is indicated by the point M in Fig. 8 and point Q in Fig. 9.

In the case of TCP, the segment loss was detected at time 2.880, and cwnd fell to four (indicated by point N in Fig. 8). The next change of cwnd was at time 3.413, when cwnd increased to 4.25, according to the congestion avoidance algorithm [15]. At times 3.897, 3.909, and 3.921, the cwnd increased to 4.485, 4.708, and 4.921, respectively. The cwnd finally increased to 5.124 at time 3.927 (indicated by point P in Fig. 4)

In the case of SCTP, cwnd fell from 13032 bytes (about 9 segments) to 6516 (4.5 segments), indicated by point R in Fig. 5. At time 3.904, the cwnd increased to 7964 bytes [14] given by point S, then at time 4.424 to 9412 bytes and so on.

TCP's cwnd increased from 4 segments to 5.124 segments in 1.05 seconds. On the other hand, it took only 0.52 seconds for the cwnd of SCTP to increase from 6516 bytes (about 4.5 segments) to 7964 bytes (about 5.5 segments). Details of how SCTP is able to increase its cwnd faster while recovering from a segment loss are presented below.

C1. Analysis of Congestion Control and Retransmission of TCP and SCTP

This section individually looks into how TCP and SCTP sources handle segment losses. To allow for a comparable scenario, we configured our simulation to drop the packet with the same sequence number for both TCP and SCTP.

C.2 TCP

Fig. 10 shows the time-sequence diagram for the TCP connection when segment 8 was dropped in the bottleneck link. The segment was dropped at time 2.336 when the cwnd was eight. Since the connection was in the slow-start phase, the arrival of the SACK for segment 7 at time 2.856 resulting in clocking out of segments 15 and 16. Dupacks started arriving at time 2.869. On arrival of the first two dupacks, no new segments were clocked out. When the third dupack arrived at the source at time 2.880, segment 8 was Fast Retransmitted, and cwnd dropped from nine segments to four segments. The flight size at this point was six. So when the next two dupacks arrived, the TCP source did not send out new segments. On arrival of the sixth dupack at time 2.898, flight size came down to three, so the cwnd allowed the TCP source to clock out a new segment (number 17). From the time segment 8 was retransmitted, the cwnd remained constant at four. Only after the arrival of cumulative SACK (acknowledging the retransmitted segment as well as all other intermediate segments) acknowledging a new segment at time 3.413, the cwnd was increased by a fraction to 4.25. As illustrated earlier, the cwnd reached 5.124 after arrival of another four SACKs at the source.

D. Result Summary

SCTP has several advantages over TCP while recovering from a segment loss. Firstly, when the dupacks start arriving, SCTP is able to clock out new segments, whereas TCP cannot. This contributes significantly towards SCTP's improved through-put [13].

Secondly, since SCTP measures flight size in bytes, and is decreased by the number of bytes acknowledged (instead of the number of segments), it can fall below cwnd faster, so as to allow quicker transmission of new segments. Since TCP keeps track of flight size and cwnd in number of segments, it takes more SACKs to arrive before a new segment can be transmitted.

Thirdly, SCTP is able to increase its cwnd from its current value (instead of from cwnd=1 MTU) using slow-start on arrival of the cumulative SACK after Fast Retransmit. As the case above has shown, the cwnd had dropped to 6516 bytes during Fast Retransmit, and it had remained at this value until the cumulative SACK arrived at time 3.904, when the cwnd jumped to 7964 bytes. This gives the SCTP source a significant advantage, since the cwnd is immediately increased by the number of data bytes acknowledged by the cumulative SACK. TCP, on the other hand, does not change its cwnd with the arrival of the cumulative SACK. Instead, it increases by only a fraction of the current cwnd when the next SACK arrives.

VI. HIGH BOTTLENECK LINK UTILIZATION

To observe if there is any difference in fairness in the case when the bottleneck (satellite) link is utilized almost completely, we have conducted a separate set of experiments in which the bandwidth of L_s is set to a very low value. The topology of Fig. 2 was used. Four simulations were run as Described in Sec. V. The only difference from the previous set of experiments was that the bandwidth value of L_s was set at 0.2 Mbps for all the simulations. Table III shows the percentage increase in throughput, Link utilization and fairness for the four new experiments carried out. The results show that the shared link utilization is improved considerably. The SCTP sources once again achieve a positive percentage increase in throughput, ranging from 14.9% to 30.6%. It can also be observed that the fairness index is high, indicating fairness when TCP and SCTP sources share the

same satellite network.

VII. CONCLUSION

Through experimentations presented in this paper, we have established that there is almost complete fairness in a long-delay network in which TCP and SCTP sources compete for common resources.

REFERENCES

- [1] Phillips, C., and Kirkby, P., : “ATM and the future of telecommunication networking,” *Electronics and Communication Engineering Journal*, vol. 11, no. 3, pp. 108-124, June 1999
- [2] Fernandez, R.J., and Mutka, M.W.: “A burst-level priority scheme for bursty traffic in ATM networks,” *Computer Networks*, vol. 31, pp. 33-45, 1999.
- [3] Gupta, B.K., Sharma, S.C., and Lal, M. : “Evaluation of cell loss probability of shared-memory ATM switch,” *Journal of the CSI*, vol. 30, no. 4, pp. 15-20, Dec. 2000, INDIA.
- [4] Gupta, B.K., Lal, M., and Sharma, S.C. : “Fuzzy logic control for VBR traffic in ATM networks,” *Journal of the CSI*, vol. 31, no. 3, pp. 35-39, Sept. 2001, INDIA.
- [5] Andrew S. Tanenbaum, 'Computer Networks' Vrije University Amsterdam, The Netherlands, Published by Pearson Education (Singapore) 4th, Edition, p.p 384- 395., 2003
- [6] Andrzej Bartoszewicz, Tomasz Molik, “ABR Traffic Control over Multi-Source Single-Bottleneck ATM Networks”, *Int. J. Appl. Math. Comput. Sci.*, Vol. 14, No. 1, 43–51, 2004